




塑膠濾網 PLASTIC FAN FILTER KITS

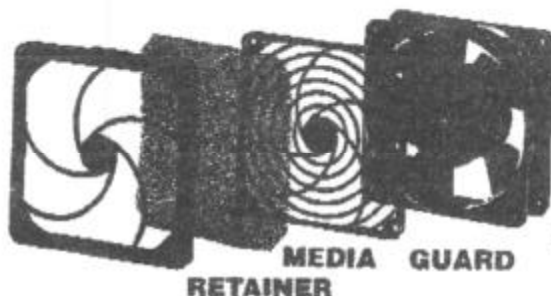

FAN 40 □ mm
60 □ mm
80 □ mm
92 □ mm
120 □ mm
172□, 150

GUARD
• Plastic UL 94V-0
• Meets spacing UL 25" 15.2mm max.
• Depressing nose level while creasing low air restriction
Part No. G40P, G60P
G80P, G92P, G120P
G172P

RETAINER
• Plastic UL 94V-0
• Easy to install, no need to remove fan or guard
• Technically designed for low air resistance
Part No. R40P, R60P
R80P, R92P, R120P
R172P

MEDIA
• PU foam 15, 30 or 45 PPI
• Easy to install, no need to remove fan or guard
• To reduce external fan noise
Part No. M40, M60
M80, M92, M120
M172



These plastic fan filter kits are technically designed for the removal of dust and contaminating particles for 1⁹/₁₆ (40mm), 2³/₈ (60mm), 3¹/₈ (80mm), 3⁵/₈ (92mm), 4¹/₁₆ (120mm) and 6 (φ172, 150 mm) inch tubeaxial fans. Very simple and quick installation: Four mounting screws secure the guard to fan, then snap on the retainer and filter media with no extra hardware required.

Maintenance is very simple, the guard portion and cooling fan do not need to be removed. Simply remove the retainer and replace or clean the media, while leaving in place the guard to ensure complete protection from fan blade.

Those applications that do not require air filtration, but do require a finger guard, we suggest our complete line of plastic or wire formed guards that can be designed to meet specific customer requirements, including the UL25 inch plug gage test.

For Fan Sizes 使用風扇尺寸	Part No.	Description	Dimension (mm)		
			A	B	C
1 ⁹ / ₁₆ " 40 □ mm	G40P	Guard	40.0	32	6.3
	R40P	Retainer	37.0		3.2
	M40-30, 45	Media 30 or 45 PPI	37.0		3.0
	GRM 40-30	Guard+Retainer+Media 30 PPI	40.0	32	6.3
	GRM 40-45	Guard+Retainer+Media 45 PPI	40.0	32	6.3
2 ³ / ₈ " 60 □ mm	G60P	Guard	60.0	50	6.5
	R60P	Retainer	56.2		3.2
	M60-30, 45	Media 30 or 45 PPI	57.0		3.0
	GRM 60-30	Guard+Retainer+Media 30 PPI	60.0	50	6.5
	GRM 60-45	Guard+Retainer+Media 45 PPI	60.0	50	6.5
3 ¹ / ₈ " 80 □ mm	G80P	Guard	80.0	71.5	6.6
	R80P	Retainer	83.5		9.8
	M80-30, 45	Media 30 or 45 PPI	78.0		3.0
	GRM 80-30	Guard+Retainer+Media 30 PPI	83.6	71.5	9.8
	GRM 80-45	Guard+Retainer+Media 45 PPI	83.6	71.5	9.8
3 ⁵ / ₈ " 92 □ mm	G92P	Guard	92.0	82.5	6.4
	R92P	Retainer	96.5		9.9
	M92-30, 45	Media 30 or 45 PPI	90.0		3.0
	GRM 92-30	Guard+Retainer+Media 30 PPI	96.5	82.5	9.9
	GRM 92-45	Guard+Retainer+Media 45 PPI	96.5	82.5	9.9
4 ¹ / ₁₆ " 120 □ mm	G120P	Guard	117.0	104.8	7.2
	R120P	Retainer	123.7		10.8
	M120-30, 45	Media 30 or 45 PPI	115.0		3.0
	GRM 120-30	Guard+Retainer+Media 30 PPI	123.7	104.8	10.8
	GRM 120-45	Guard+Retainer+Media 45 PPI	123.7	104.8	10.8
6" φ172, 150mm	G172P	Guard			
	R172P	Retainer			
	M172-15, 30, 45	Media 15, 30 or 45 PPI			
	GRM 172-15	Guard + Retainer+Media 15 PPI	φ180 × φ153 × 8		
	GRM 172-30	Guard + Retainer+Media 30 PPI	φ180 × φ153 × 8		
	GRM 172-45	Guard + Retainer+Media 45 PPI	φ180 × φ153 × 8		

PPI=porous per inch 15, 30, 45 available



GRM40



GRM60




GRM92



GRM80



GRM120



GRM172